

WED-35C/45C ET2 HIGH SPIN WASHER EXTRACTORS



EASY TOUCH 2

7" touch screen, user-friendly and fully programmable
Connection USB. Free software online for programming,
telemetry, data analysis...
Videos display (ads, instructions...)
37 available languages
8 dosing signals as standard.



G FACTOR

High G factor 450: reduced residual moisture, reduced
drying time, energy savings



EFFICIENCY

Optimized consumption: automatic or manual adjustment
of water levels and detergents according to the load
Water Saving system: 3 configurable levels of savings
Ready for water recovery tanks AQUABAC



VERSATILITY

OPL <> SELF-SERVICE
ELECTRIC <> HOT WATER
MAKE TO ORDER: possibility to customize
WET CLEANING as standard



CONNECTIVITY

Communication Danube Online - IoT as standard
Remote technical service
Management of laundry
Multi-payment system



ERGONOMICS

Big aluminium door ø 560 mm
Easy door lock system



MAINTENANCE

Hinged panel: easy access to parts
Technical menu: statistics, errors...



OTHERS

Free standing: no anchoring to the floor
Stainless steel vat and drum, skinplate outer casing
3 water inlets
4 compartments detergents box
Imbalance controlled by frequency inverter
CE and WRAS certificates. ETL option.




OPTIONS

- 2 dosing pumps kit DQ-2
- Additional dosing pump DB-1
- Double drain
- Normally closed valve
- AQUA FLOW bath recirculation kit
- Leveling feet
- Automatic weighing system on feet
- 6 additional dosing signals
- Silicone door gasket
- Reversing door opening
- Tropicalized model (ET2)
- Steam transformation kit
- Ergonomic plinth for loading height
- AISI-304 stainless steel outer casing or front panel
- Automatic door unlock device (in case of power failure)
- Coin kits: tokens or coins meter + box, central pay
- Other tensions

| TECHNICAL DATA | UNIT. | WED-35C | | WED-45C | |
|--|---------------------|---------------|--|----------------|--|
| DRUM | | | | | |
| Capacity 1:9 / 1:10 | kg | 39 / 35 | | 50 / 45 | |
| Volume | l | 350 | | 450 | |
| Diameter | mm | 860 | | 860 | |
| Depth | mm | 602 | | 720 | |
| GENERAL DATA | | | | | |
| Washing / extraction speed | r.p.m. | 42,5 / 966 | | 42,5 / 966 | |
| G factor | - | 450 | | 450 | |
| Maximum force transmitted | KN | 7,36 ±2,45 | | 7,36 ±2,45 | |
| Frequency dynamic force | Hz | 14,3 | | 14,3 | |
| Sound level | dB | <70 | | <70 | |
| Self-service version | - | YES | | YES | |
| Double drain | - | OPT | | OPT | |
| Weighing / Tilting system | - | OPT / NO | | OPT / NO | |
| Sluice option | - | NO | | NO | |
| DOOR | | | | | |
| Height center / base door | mm | 885 / 540 | | 885 / 540 | |
| Diameter | mm | 560 | | 560 | |
| POWER | | | | | |
| Motor | kW | 6 | | 6 | |
| Heating (Elec. models) | kW | 21 | | 21 | |
| Max. elec. power (Elec. models) | kW | 22 | | 22 | |
| Max. elec. power (steam or hot w.) | kW | 6 | | 6 | |
| CONNECTIONS | | | | | |
| | | ELECTRIC | | STEAM / HOT W. | |
| Tension 230V - I + N + T | N° x mm2 / A | - | | - | |
| Tension 230V - III + T | N° x mm2 / A | 3 x 16 / 63A | | 3 x 4 / 32A | |
| Tension 400V - III + N + T | N° x mm2 / A | 4 x 6 / 40A | | 4 x 2,5 / 20A | |
| Steam inlet (steam mod.) | Inch | 3/4" | | 3/4" | |
| Max. steam consumption | Kg/h | 18 | | 18 | |
| Water inlet | Inch | 3/4" | | 3/4" | |
| Water pressure | Kgs/cm ² | 2-4 | | 2-4 | |
| Maximum water consumption* | Lit/h | 261,3 | | 335,9 | |
| Drain | Inch | 3" | | 3" | |
| Drain flow | Lit/min | 200 | | 200 | |
| DIMENSIONS / PACKING DIMENSIONS | | | | | |
| Net / gross length | mm | 1.095 / 1.165 | | 1.095 / 1.195 | |
| Net / gross depth | mm | 1.184 / 1.230 | | 1.304 / 1440 | |
| Net / gross height | mm | 1.598 / 1.920 | | 1.598 / 1.920 | |
| Net / gross weight | kg | 750 / 820 | | 770 / 840 | |
| Volume | m3 | 2,75 | | 3,3 | |

* N°20 Program, 75% load

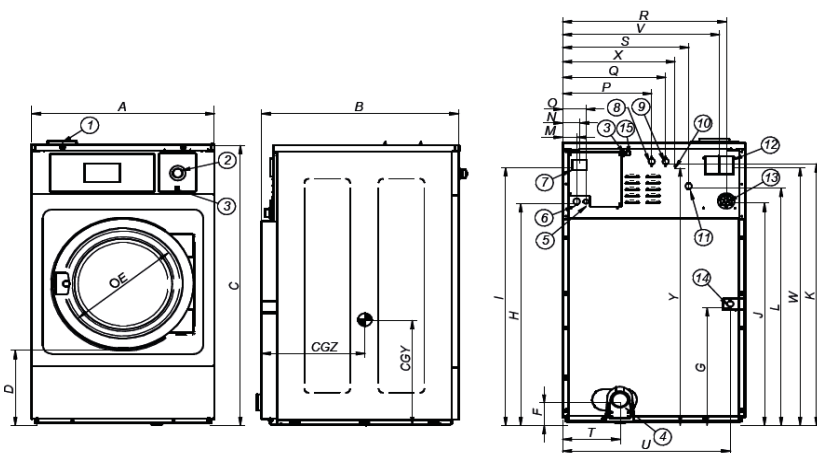

1. SOAP DISPENSER
2. EMERGENCY STOP
3. USB PORT
4. DRAIN
5. ELECTRICAL CONNECTION TO LIQUID SOAP PUMPS
6. ELECTRICAL CONNECTION
7. MAIN SWITCH
8. AUXILIAR WATER INLET
9. HOT WATER INLET
10. EQUIPOTENTIAL CONNECTION
11. COLD WATER INLET
12. BLUR OUTPUT / WATER OVERLOAD
13. LIQUID SOAP CONNECTION
14. STEAM CONNECTION
15. ETHERNET PORT

| | A | B | C | D | E | F | G | H | I | J | K | L | M | N | O | P | Q | R | S | T | U | V | W | X | Y | CGY | CGZ |
|---------|-------|-------|-------|-----|-----|-----|-----|-------|-------|-------|-------|-------|----|----|-----|-----|-----|-----|-----|-----|-------|-----|-------|-----|-------|-----|-----|
| WED-35C | 1.095 | 1.184 | 1.600 | 525 | 560 | 158 | 576 | 1.330 | 1.498 | 1.331 | 1.513 | 1.417 | 61 | 74 | 101 | 596 | 676 | 976 | 808 | 384 | 1.028 | 946 | 1.496 | 740 | 1.558 | 795 | 732 |
| WED-45C | 1.095 | 1.304 | 1.600 | 525 | 560 | 158 | 576 | 1.330 | 1.498 | 1.331 | 1.513 | 1.417 | 61 | 74 | 101 | 596 | 676 | 976 | 808 | 384 | 1.028 | 946 | 1496 | 740 | 1.558 | 795 | 800 |

