

# WED-60C/80C ET2 HIGH SPIN WASHER EXTRACTORS



## EASY TOUCH 2

7" touch screen, user-friendly and fully programmable  
Connection USB. Free software online for programming,  
telemetry, data analysis...  
Videos display (ads, instructions...)  
37 available languages  
8 dosing signals as standard.



## G FACTOR

**High G factor 450:** reduced residual moisture, reduced  
drying time, energy savings



## EFFICIENCY

Optimized consumption: automatic or manual adjustment  
of water levels and detergents according to the load  
Water Saving system: 3 configurable levels of savings  
Ready for water recovery tanks AQUABAC



## VERSATILITY

ELECTRIC <> HOT WATER  
MAKE TO ORDER: possibility to customize  
WET CLEANING as standard



## CONNECTIVITY

**Communication Danube Online - IoT as standard**  
Remote technical service  
Management of laundry



## ERGONOMICS

Big aluminium door ø 560 mm  
Easy door lock system



## MAINTENANCE

Hinged panel: easy access to parts  
Technical menu: statistics, errors...



## OTHERS

Free standing: no anchoring to the floor  
Stainless steel vat and drum, skinplate outer casing  
3 water inlets  
5 compartments detergents box  
Imbalance controlled by frequency inverter  
CE and WRAS certificates. ETL option.




## OPTIONS

- 2 dosing pumps kit DQ-2
- Additional dosing pump DB-1
- Double drain
- Normally closed valve
- Double or front tilting kit
- Water inlet hoses kit
- Automatic weighing system on feet (not available with tilting kit)
- 6 additional dosing signals
- Reversing door opening
- Tropicalized model (ET2)
- Steam transformation kit
- Electric - steam dual heating kit
- AISI-304 stainless steel outer casing
- Other tensions

TECHNICAL DATA	UNIT.	WED-60C		WED-80C	
<b>DRUM</b>					
Capacity 1:9 / 1:10	kg	65 / 59		85 / 77	
Volume	l	590		770	
Diameter	mm	1.048		1.048	
Depth	mm	680		892	
<b>GENERAL DATA</b>					
Washing / extraction speed	r.p.m.	38 / 875		38 / 875	
G factor	-	450		450	
Maximum force transmitted	KN	18 ±4,2		23 ±4,8	
Frequency dynamic force	Hz	12,66		12,66	
Sound level	dB	<70		<70	
Self-service version	-	NO		NO	
Double drain	-	OPT		OPT	
Weighing / Tilting system	-	OPT / OPT		OPT / OPT	
Sluice option	-	NO		NO	
<b>DOOR</b>					
Height center / base door	mm	1.170 / 810		1.170 / 810	
Diameter	mm	560		560	
<b>POWER</b>					
Motor	kW	15		15	
Heating (Elec. models)	kW	36		48/36	
Max. elec. power (Elec. models)	kW	39		51/39	
Max. elec. power (steam or hot w.)	kW	15		15	
<b>CONNECTIONS</b>					
		ELECTRIC		STEAM / HOT W.	
Tension 230V - I + N + T	N° x mm2 / A	-		-	
Tension 230V - III + T	N° x mm2 / A	3 x 25 / 100A		3 x 10 / 50A	
Tension 400V - III + N + T	N° x mm2 / A	4 x 16 / 63A		4 x 10 / 50A	
Steam inlet (steam mod.)	Inch	3/4"		3/4"	
Max. steam consumption	Kg/h	21		25	
Water inlet	Inch	1"		1"	
Water pressure	Kgs/cm <sup>2</sup>	2-4		2-4	
Maximum water consumption*	Lit/h	598		781	
Drain	Inch	3"		3"	
Drain flow	Lit/min	200		200	
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Net / gross length	mm	1.420 / 1.600		1.420 / 1.600	
Net / gross depth	mm	1.433 / 1.595		1.645 / 1.805	
Net / gross height	mm	1.880 / 1.930		1.880 / 1.930	
Net / gross weight	kg	1.650 / 1800		1.800 / 2.000	
Volume	m3	4,9		5,6	

\* N°2 Program, 100% load

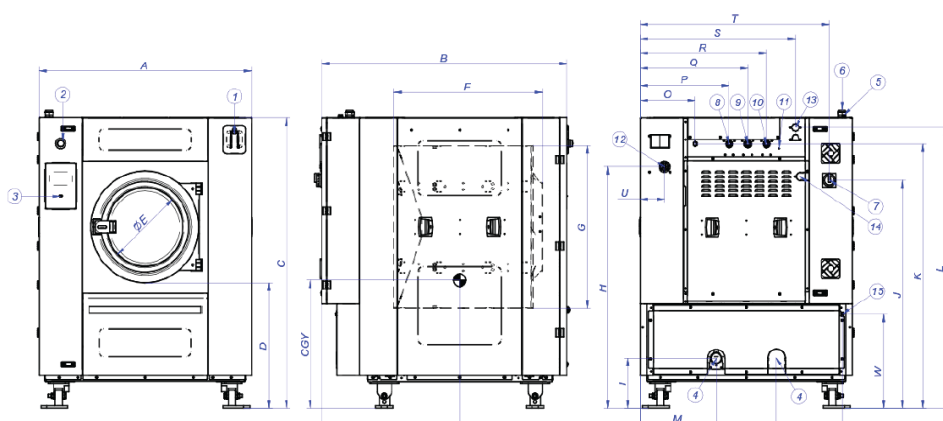

1. SOAP DISPENSER
2. EMERGENCY STOP
3. USB PORT
4. DRAIN 2
5. DRAIN 1
6. ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
7. ELECTRICAL CONNECTION
8. MAIN SWITCH
9. AUXILIAR WATER INLET
10. HOT WATER INLET
11. EQUIPOTENTIAL CONNECTION
12. COLD WATER INLET
13. STEAM OUTPUT
14. LIQUID SOAP CONNECTION
15. STEAM CONNECTION
16. AIR INTAKE
17. ETHERNET PORT

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	CGY	CGZ
WED-60C	1.420	1.433	1.880	810	560	760	1.050	1.563	323	1.475	1.710	1.817	508	912	367	595	720	845	1.040	1.267	160	1.353	608	830	820
WED-80C	1.420	1.645	1.880	810	560	972	1.050	1.563	323	1.475	1.710	1.817	508	912	367	595	720	845	1.040	1.267	160	1.353	608	830	925

