

WEN-35C/45C ET2 NORMAL SPIN WASHER EXTRACTORS



EASY TOUCH 2

7" touch screen, user-friendly and fully programmable
Connection USB. Free software online for programming,
telemetry, data analysis...
Videos display (ads, instructions...)
37 available languages
8 dosing signals as standard.



G FACTOR

G factor 200: high G factor for low spin washers, reduced
residual moisture, reduced drying time, energy savings



EFFICIENCY

Optimized consumption: automatic or manual adjustment
of water levels and detergents according to the load
Water Saving system: 3 configurable levels of savings



VERSATILITY

OPL <> SELF-SERVICE
ELECTRIC <> HOT WATER
MAKE TO ORDER: possibility to customize
WET CLEANING as standard



CONNECTIVITY

Communication Danube Online - IoT as standard
Remote technical service
Management of laundry
Multi-payment system



ERGONOMICS

Big aluminium door ø 560 mm
Easy door lock system



MAINTENANCE

Hinged panel: easy access to parts
Same parts for all the models: electronic components,
gear, inverter, contactors
Technical menu: statistics, errors...



OTHERS

Hard mounted washers to be anchored to the floor
Stainless steel vat and drum, skinplate outer casing
3 water inlets
4 compartments detergents box
Imbalance controlled by frequency inverter
CE and WRAS certificates. ETL option.




OPTIONS

- 2 dosing pumps kit DQ-2
- Additional dosing pump DB-1
- Double drain
- SLUICE: model with 8 mm drum holes
- Anchoring base
- Normally closed valve
- AQUA FLOW bath recirculation kit
- 6 additional dosing signals
- Reversing door opening
- Tropicalized model (ET2)
- Steam transformation kit
- AISI-304 stainless steel outer casing or front panel
- Automatic door unlock device (in case of power failure)
- Coin kits: tokens or coins meter + box, central pay
- Other tensions

TECHNICAL DATA	UNIT.	WEN-35C ET2	WEN-45C ET2		
DRUM					
Capacity 1:9 / 1:10	kg	39 / 35	49 / 45		
Volume	l	350	450		
Diameter	mm	860	860		
Depth	mm	602	720		
GENERAL DATA					
Washing / extraction speed	r.p.m.	45 / 644	45 / 644		
G factor	-	200	200		
Maximum force transmitted	KN	4,59 ±8	5,09 ±8		
Frequency dynamic force	Hz	7,58	7,58		
Sound level	dB	<70	<70		
Self-service version	-	YES	YES		
Double drain	-	OPT	OPT		
Weighing / Tilting system	-	NO / NO	NO / NO		
Sluice option	-	YES	YES		
DOOR					
Height center / base door	mm	735 / 440	735 / 440		
Diameter	mm	560	560		
POWER					
Motor	kW	4	6		
Heating (Elec. models)	kW	21	21		
Max. elec. power (Elec. models)	kW	22	22		
Max. elec. power (steam or hot w.)	kW	4	6		
CONNECTIONS					
		ELECTRIC	STEAM / HOT WATER	ELECTRIC	STEAM / HOT WATER
Tension 230V - I + N + T	Nº x mm2 / A	-	2 x 4 / 32A	-	2 x 4 / 32A
Tension 230V - III + T	Nº x mm2 / A	3 x 16 / 63A	-	3 x 16 / 63A	-
Tension 400V - III + N + T	Nº x mm2 / A	4 x 6 / 40A	-	4 x 6 / 40A	-
Steam inlet (steam mod.)	Inch	3/4"		3/4"	
Max. steam consumption	Kg/h	18		21	
Water inlet	Inch	3/4"		3/4"	
Water pressure	Kgs/cm ²	2-4		2-4	
Maximum water consumption*	Lit/h	199,6		256,6	
Drain	Inch	3"		3"	
Drain flow	Lit/min	200		200	
DIMENSIONS / PACKING DIMENSIONS					
Net / gross length	mm	979 / 1.050		979 / 1.050	
Net / gross depth	mm	1.066 / 1.250		1.255 / 1.440	
Net / gross height	mm	1.411 / 1.600		1.411 / 1.640	
Net / gross weight	kg	473 / 503		600 / 670	
Volume	m3	2,1		2,5	

* N°20 Program, 75% load

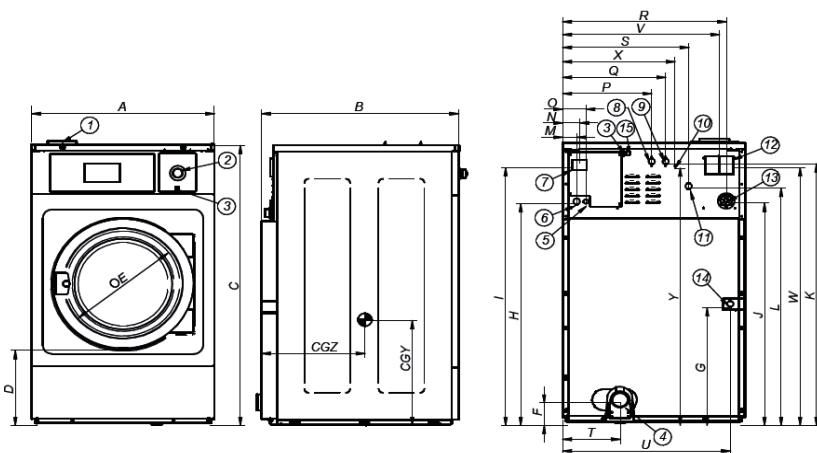

1. SOAP DISPENSER
2. EMERGENCY STOP
3. USB PORT
4. DRAIN
5. ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
6. ELECTRICAL CONNECTION
7. MAIN SWITCH
8. AUXILIAR WATER INLET
9. HOT WATER INLET
10. EQUIPOTENTIAL CONNECTION
11. COLD WATER INLET
12. BLUR OUTPUT / WATER OVERLOAD
13. LIQUID SOAP CONNECTION
14. STEAM CONNECTION
15. ETHERNET PORT

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
WEN-35C	979	1.065	1.411	370	560	147	623	1.139	1.307	1.116	1.322	1.211	61	74	101	545	625	885	715	262	917	855	1.281	760	1.373	635	682
WEN-45C	979	1.185	1.411	370	560	147	623	1.139	1.307	1.116	1.322	1.211	61	74	101	545	625	885	715	262	917	855	1.281	760	1.373	635	760

