



WED-35C ET2 High spin washers



EASY TOUCH 2

7" touch screen, user-friendly and fully programmable
Connection USB. Free software online for programming, telemetry, data analysis...
Videos display (ads, instructions...)
37 available languages
8 dosing signals as standard



G FACTOR

High G factor: reduced residual moisture, reduced drying time, energy savings



EFFICIENCY

Optimized consumption: automatic or manual adjustment of water levels and detergents according to the load
Water Saving system: 3 configurable levels of savings
Ready for water recovery tanks AQUABAC



VERSATILITY

ELECTRIC <> HOT WATER
MAKE TO ORDER: possibility to customize
WET CLEANING as standard



CONNECTIVITY

Communication Danube Online - IoT as standard
Remote technical service
Management of laundry
Multi-payment system



ERGONOMICS

Big aluminium door
Easy door lock system



MAINTENANCE

Hinged panel: easy access to parts
Technical menu: statistics, errors...



OTHERS

Free standing: no anchoring to the floor
Stainless steel vat and drum, skinplate outer casing
3 water inlets
Detergents box with compartments
Imbalance controlled by frequency inverter
CE standards and KIWA for REG4 standards



OPTIONS

- Dosing pumps kit DQ-2
- Additional dosing pump DB-1
- RT Ready for AQUABAC XL conn. 1" for washers WEN/WED-35C/45C
- DD Double drain kit WED-35C-45C
- Kit WATERMARK Australia
- NC Normally closed valve WED-35C
- RC AQUA FLOW water recirculation kit WED-35C-45C (not available with AQUABAC)
- LG Level feet kit WED-11 to 28
- WS weighing system WED-11 to 45C (XD card to be ordered separately)
- XD 6 extra dosing signals card WED-11-45C
- RD reverse door opening
- TR Protected board ET2 for WED-11-45C (standard on 60 to 120 kg models)
- Steam kit WED-28-35C-45C (to transform E or HW models to steam)
- SSC Stainless steel outer casing AISI-304 WED-35C
- SSF Stainless steel front panel AISI-304 WED-35C
- 440V 3~ (No N) 50/60 Hz 35C
- 230V 3~ 50/60Hz 35C
- 230V III 50/60 - 35/45 kg
- IoT licence - Danube Online
- Several payment systems for self-service
- UD Kit temporized door opening WED-WEN


TECHNICAL DATA		UNIT.	WED-35C ET2	
DRUM				
Load capacity 1:9 / 1:10		Kg	39/35	
Volume		l	350	
		gal	92,4	
Diameter		mm	860	
		inch	33,8	
Depth		mm	602	
		inch	23,7	
GENERAL DATA				
Washing speed / Spin speed		r.p.m.	42,5 /966	
G factor		-	450	
Maximum transmitted force		KN	7,36 ±2,45	
Dynamic force frequency		Hz	14,3	
Sound level		dB	< 70	
Self-service version		-	YES	
Double drain		-	OPT.	
Weighing system / Tilting system		-	OPT./NO	
SLUICE option		-	NO	
DOOR				
Door centre height / Door base height		mm	1000 / 640	
		inch	34,8 / 21,2	
Diameter		mm	560	
		inch	22	
POWER				
Motor		kW	6	
Electric heating (electric model)		kW	21	
Maximum electric power		kW	22	
Max. power steam & hot water model		kW	6	
CONNECTIONS			E	HW/S
Voltage 110V - 1 + N + E		Nº x mm2 / A	-	-
		Nº x AWG / A	-	-
Voltage 230V - 1 + N + E		Nº x mm2 / A	-	-
		Nº x AWG / A	-	-
Voltage 230V - 3 + E		Nº x mm2 / A	4x16 / 63A	4x4 / 32A
		Nº x AWG / A	4x5 / 80A	4x11 / 30A
Voltage 400V - 3 + N + E		Nº x mm2 / A	5x6 / 40A	5x1,5 / 16A
		Nº x AWG / A	5x9 / 45A	5x15 / 15A
Steam inlet (steam model)		inch	3/4"	
Max. steam consumption (steam model)		Kg/h	18	
Water inlet		inch	3/4"	
Water pressure		Kgs/cm2	2-4	
Max. water consumption*		Lit/h	261,3*	
		GPH	69*	
Drain		inch	3"	
Drain capacity		Lit/min	200	
		GPM	52,8	
DIMENSIONS / PACKING DIMENSIONS				
Net width / Gross width		mm	1.095 / 1.205	
		inch	43,1 / 47,4	
Net depth / Gross depth		mm	1.184 / 1.330	
		inch	46,6 / 52,3	
Net height / Gross height		mm	1.730/ 1.850	
		inch	68,1 / 72,8	
Net weight / Gross weight		kg	735 / 786	
		lb	1620,4 / 1732,8	



Packing volume	m3	2,7
	ft3	95,3

*Programme no.20, 75% load

**Programme no.2, 100% load

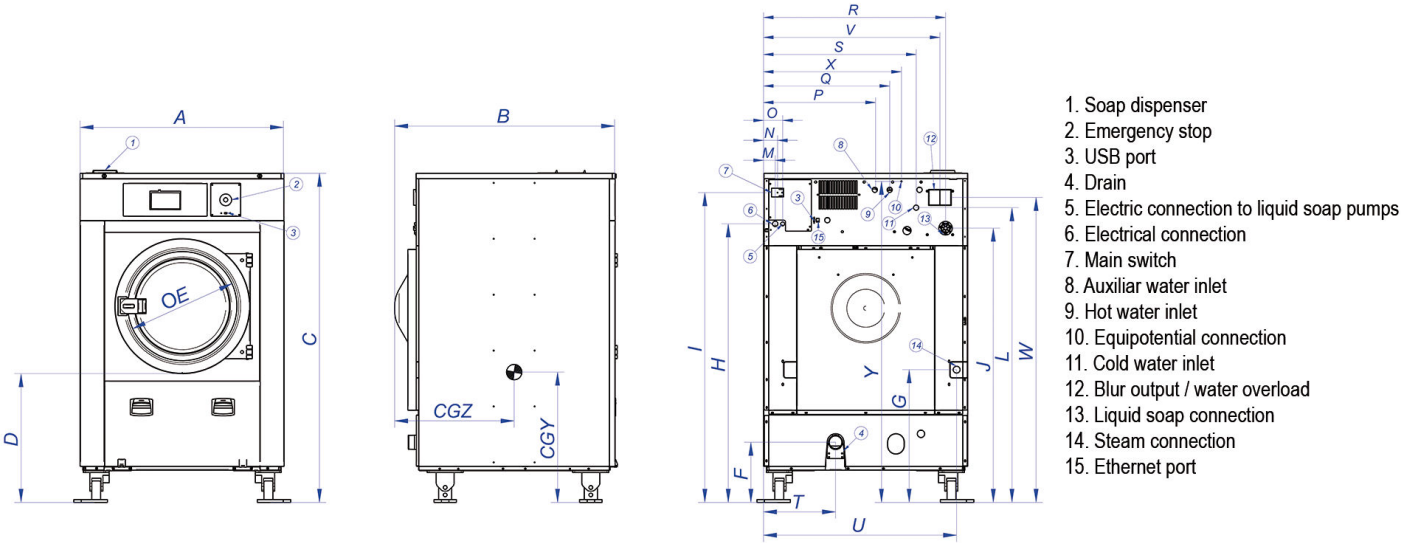

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
WED-35C	mm	1 095	1 184	1 767	698	560	328	712	1 500	1 668	1 501	1 683	1 587	61	74	101	596	676	976	808	384	1 037	946	1 472	740	1 723	965	732
WED-45C	mm	1 095	1 304	1 767	698	560	328	712	1 500	1 668	1 501	1 683	1 587	61	74	101	596	676	976	808	384	1 037	946	1 472	740	1 723	965	800

