



WED-45C ET2 High spin washers



EASY TOUCH 2

7" touch screen, user-friendly and fully programmable
Connection USB. Free software online for programming, telemetry, data analysis...
Videos display (ads, instructions...)
37 available languages
8 dosing signals as standard



G FACTOR

High G factor: reduced residual moisture, reduced drying time, energy savings



EFFICIENCY

Optimized consumption: automatic or manual adjustment of water levels and detergents according to the load
Water Saving system: 3 configurable levels of savings
Ready for water recovery tanks AQUABAC



VERSATILITY

ELECTRIC <> HOT WATER
MAKE TO ORDER: possibility to customize
WET CLEANING as standard



CONNECTIVITY

Communication Danube Online - IoT as standard
Remote technical service
Management of laundry
Multi-payment system



ERGONOMICS

Big aluminium door
Easy door lock system



MAINTENANCE

Hinged panel: easy access to parts
Technical menu: statistics, errors...



OTHERS

Free standing: no anchoring to the floor
Stainless steel vat and drum, skinplate outer casing
3 water inlets
Detergents box with compartments
Imbalance controlled by frequency inverter
CE standards and KIWA for REG4 standards



OPTIONS

- Dosing pumps kit DQ-2
- Additional dosing pump DB-1
- RT Ready for AQUABAC XL conn. 1" for washers WEN/WED-35C/45C
- DD Double drain kit WED-35C-45C
- Kit WATERMARK Australia
- NC Normally closed valve WED-45C
- RC AQUA FLOW water recirculation kit WED-35C-45C (not available with AQUABAC)
- LG Level feet kit WED-11 to 28
- WS weighing system WED-11 to 45C (XD card to be ordered separately)
- XD 6 extra dosing signals card WED-11-45C
- RD reverse door opening
- TR Protected board ET2 for WED-11-45C (standard on 60 to 120 kg models)
- Steam kit WED-28-35C-45C (to transform E or HW models to steam)
- SSC Stainless steel outer casing AISI-304 WED-45C
- 440V 3~ (No N) 50/60 Hz 45C
- 230V 3~ 50/60Hz 45C
- IoT licence - Danube Online
- Several payment systems for self-service
- UD Kit temporized door opening WED-WEN


TECHNICAL DATA	UNIT.	WED-45C ET2	
DRUM			
Load capacity 1:9 / 1:10	Kg	47/42	
Volume	l	450	
	gal	118,8	
Diameter	mm	860	
	inch	33,8	
Depth	mm	720	
	inch	28,3	
GENERAL DATA			
Washing speed / Spin speed	r.p.m.	42,5 / 966	
G factor	-	450	
Maximum transmitted force	KN	7,36 ±2,45	
Dynamic force frequency	Hz	14,3	
Sound level	dB	< 70	
Self-service version	-	NO	
Double drain	-	OPT.	
Weighing system / Tilting system	-	OPT.	
SLUICE option	-	NO	
DOOR			
Door centre height / Door base height	mm	1000 / 640	
	inch	34,8 / 21,2	
Diameter	mm	560	
	inch	22	
POWER			
Motor	kW	6	
Electric heating (electric model)	kW	21	
Maximum electric power	kW	22	
Max. power steam & hot water model	kW	6	
CONNECTIONS		E	HW/S
Voltage 110V - 1 + N + E	Nº x mm2 / A	-	-
	Nº x AWG / A	-	-
Voltage 230V - 1 + N + E	Nº x mm2 / A	-	-
	Nº x AWG / A	-	-
Voltage 230V - 3 + E	Nº x mm2 / A	4x16 / 63A	4x4 / 32A
	Nº x AWG / A	4x5 / 70A	4x11 / 30A
Voltage 400V - 3 + N + E	Nº x mm2 / A	5x6 / 40A	5x1,5 / 16A
	Nº x AWG / A	5x9/ 45A	5x15 / 15A
Steam inlet (steam model)	inch	3/4"	
Max. steam consumption (steam model)	Kg/h	18	
Water inlet	inch	3/4"	
Water pressure	Kgs/cm2	2-4	
Max. water consumption*	Lit/h	335,9*	
	GPH	88,7*	
Drain	inch	3"	
Drain capacity	Lit/min	200	
	GPM	52,8	
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	mm	1.095 / 1.205	
	inch	43,1 / 47,4	
Net depth / Gross depth	mm	1.304 / 1.440	
	inch	51,3 / 56,69	
Net height / Gross height	mm	1.730/ 1.850	
	inch	68,1 / 72,8	
Net weight / Gross weight	kg	747/853	
	lb	1646,8 / 1880,5	



Packing volume	m3	3,3
	ft3	116,5

*Programme no.20, 75% load

**Programme no.2, 100% load

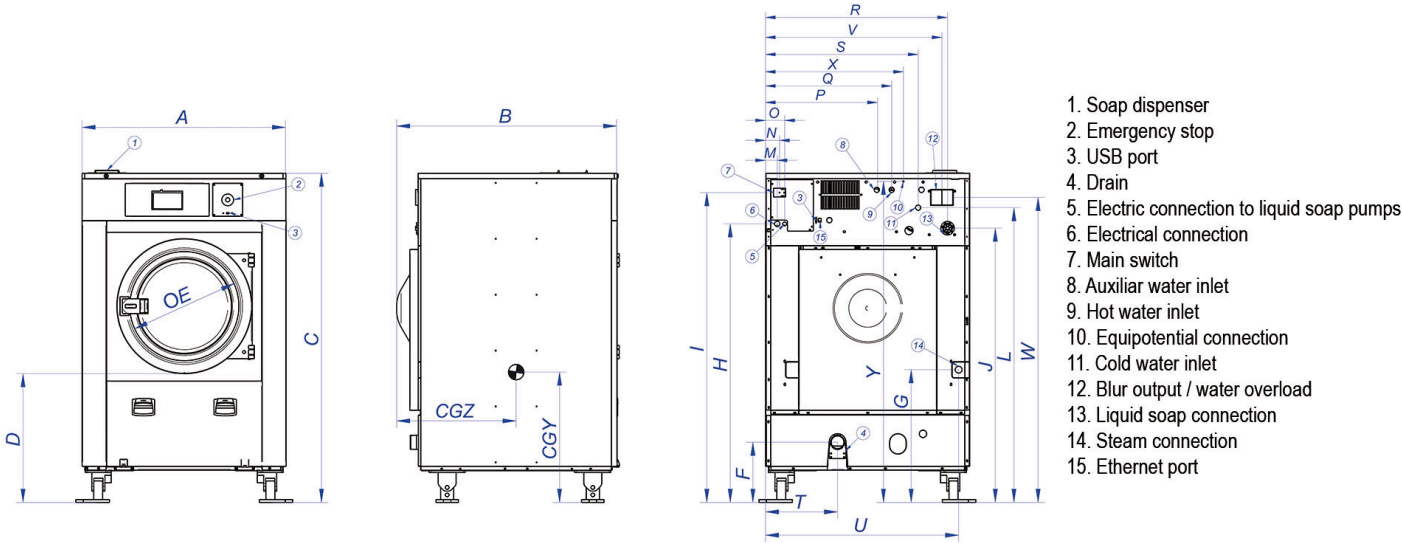

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
WED-35C	mm	1 095	1 184	1 767	698	560	328	712	1 500	1 668	1 501	1 683	1 587	61	74	101	596	676	976	808	384	1 037	946	1 472	740	1 723	965	732
WED-45C	mm	1 095	1 304	1 767	698	560	328	712	1 500	1 668	1 501	1 683	1 587	61	74	101	596	676	976	808	384	1 037	946	1 472	740	1 723	965	800

